

NRC·CMRC CONSTRUCTION

Acoustic Testing of AMC Mechanocaucho Akustick + Sylomer Floor Mount 25

Author: Julie McIntyre
Report Number: A1-019524.3
Report Date: 31/05/2022
Contract Number: A1-019524
Agreement Date: 30/03/2021



National Research
Council Canada

Conseil national de
recherches Canada

Canada

This page was intentionally left blank

Acoustic Testing of AMC Mechanocauchos Akustick + Sylomer Floor Mount 25

Author

McIntyre,
Julie

Digitally signed by McIntyre, Julie
DN: cn=McIntyre, Julie, c=CA,
o=GC, ou=NRC-CNRC,
email=julie.mcintyre@nrc-
nrc.gc.ca
Date: 2022.05.30 16:06:03 -04'00'

Julie McIntyre, Technical Officer

Approved

Gover,
Bradford

Digitally signed by Gover,
Bradford
DN: cn=Gover, Bradford, c=CA,
o=GC, ou=NRC-CNRC,
email=brad.gover@canada.ca
Date: 2022.06.06 17:07:50 -04'00'

Bradford Gover, Ph.D.
Director, Research and Development
Building Envelope and Materials,
Intelligent Building Operations
NRC Construction Research Centre

Report No: A1-019524.3
Report Date: 31/05/2022
Contract No: A1-019524
Agreement date: 30/03/2021
Program: BEM R&D

9 Pages

Copy no. 1 of 3

This report may not be reproduced in whole or in part without the written consent of the National Research Council Canada and the Client.

This page was intentionally left blank

Client AMC Mecanocaucho
Pol. Industrial, Zone A - Pab 35.
Asteasu E-20159, Gipuzkoa. Spain

Specimen

- 10 mm (3/8") Plywood
- 19 mm (3/4") Plywood
- 19 mm (3/4") Plywood
- 89 mm (3-1/2") Glass Fibre Insulation
* does not contribute to assembly thickness
- 89 mm (3-1/2") Wood Studs (Wood Battens)
* thickness included in cavity space depth below
- 67.5 mm (2.7") AMC Mechanocaucho Akustik + Sylomer
Floor Mount 25
* cavity space depth 116 mm (4-9/16")
- 150 mm (6") Precast Concrete Slab

Specimen ID A1-019524-03F

Specimen Description

Covering: Three layers of plywood was installed, for a total thickness of 48 mm (1-7/8"). The first layer (base layer) was a 19 mm (3/4") plywood installed perpendicular to the wood studs (wood battens) and fastened with 51 mm (2") #8 construction wood screws at 305 mm (12") o.c. intervals along the wood studs (wood battens) and 305 mm (12") o.c. intervals along the perimeter. The second layer of plywood had the same thickness as the first layer and was installed in the same orientation as the first layer of plywood but offset by 12". It was fastened to the wood studs (wood battens) through the first layer of plywood using 64 mm (2-1/2") #8 construction wood screws at the same spacing as the first layer. The third layer (face layer) was a 10 mm (3/8") plywood installed in the same orientation as the first two layers and again offset by 12". It was fastened to the wood studs (wood battens) through the first and second layers of plywood using 75 mm (3") #8 construction wood screws every 150 mm (6") o.c. along the seams and also fastened to the below layers of plywood every 150 mm (6") o.c. over the entire floor using 44 mm (1-3/4") #8 torx screws. Glass fibre insulation was installed between the edges of the plywood and the test frame. The perimeter and the seams between the plywood sheets were sealed with cloth tape.

Floor Support Structure: The support structure was constructed of 2x4 wood studs (wood battens), actually 38 mm x 89 mm (1-1/2" x 3-1/2"), installed and fastened into the floor mounts length-wise across the test frame. Each wood stud (wood batten) was fastened to the floor mounts using 38 mm (1-1/2") #8 construction wood screws, with two on each side.

Floor Mounts: The AMC Mecanocaucho Akustik + Sylomer floor mount 25 was installed at nominal 600 mm x 600 mm (23-5/8" x 23-5/8") intervals, as shown in Figure 1. The floor mounts were fastened to the concrete slab using a fast fix adhesive. The floor mounts had a depth of 67.5 mm (2.7") and with the addition of the support structure the total cavity space depth was 116 mm (4-9/16").

Insulation: The cavities between the wood studs (wood battens) and floor mounts were filled with 89 mm (3-1/2") thick glass fibre insulation.

Structural: The 150 mm (6") precast concrete slab was installed in the test frame. The perimeter was sealed from below with duct putty. The perimeter was filled from above with glass fibre insulation and sealed with cloth tape.

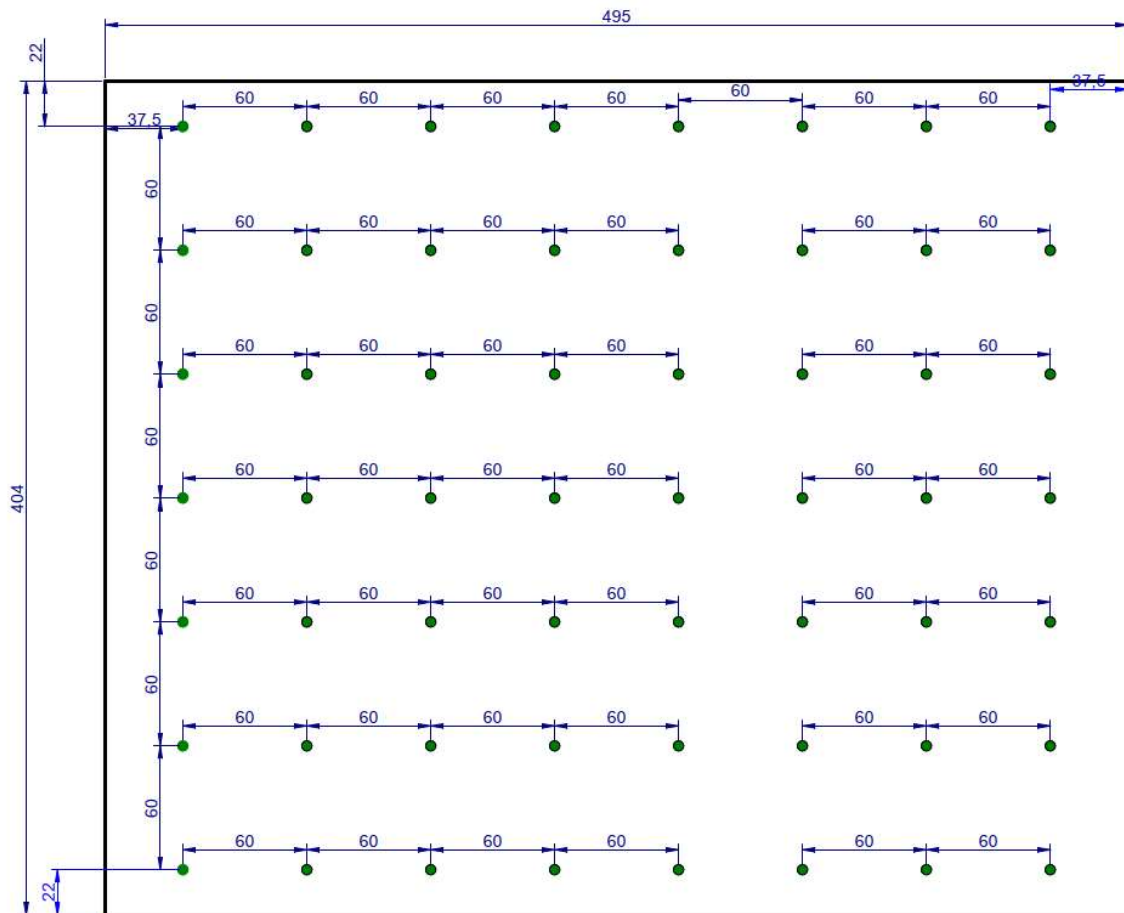


Figure 1 Floor mount installation layout.

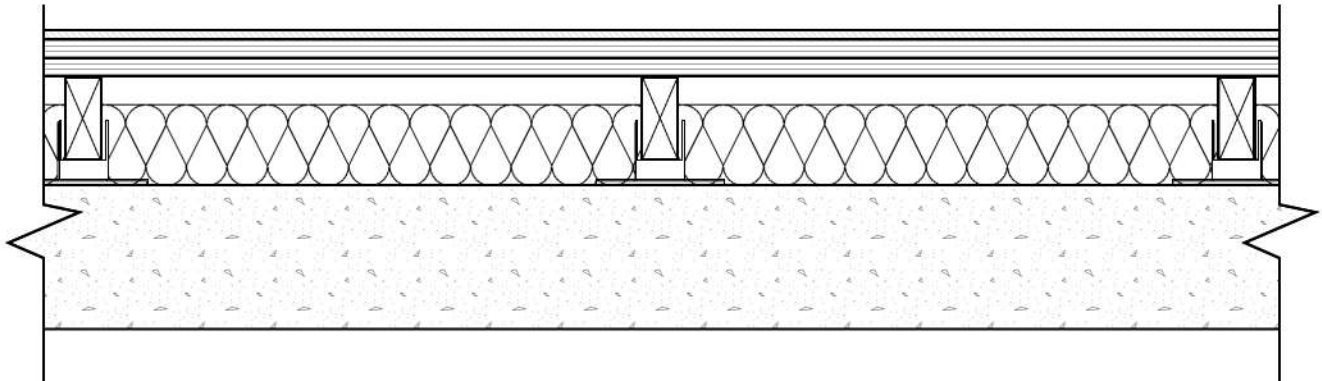


Figure 2 Cross section of A1-019524-03F.

Specimen Properties

Element	Actual Thickness (mm)	Mass/Length, Area or Volume
10 mm (3/8") Plywood	9.0	4.2 kg/m ²
19 mm (3/4") Plywood	19.0	8.3 kg/m ²
19 mm (3/4") Plywood	19.0	8.3 kg/m ²
89 mm (3-1/2") Glass Fibre Insulation	*89.0	9.3 kg/m ³
Nominal 2x4 Wood Studs (Wood Battens)	*89.0	1.6 kg/m
67.5 mm (2.7") AMC Mechanocaucho Akustik + Sylomer Floor Mount 25	**116.0	140.0 grams/mount
150 mm (6") Precast Concrete Slab	155.6	370.6 kg/m ²
Total	318.6	

* The thicknesses of these elements do not contribute to the total specimen thickness.

** Total cavity space thickness of the floor mounts and support structure.

Test Specimen Installation

- The exposed area of the floor specimen used for the calculations of the airborne sound transmission loss was 17.85 m² (4.71 m x 3.79 m).
- The total area of the floor assembly resting on top of the lip was 19.32 m² (4.88 m x 3.96 m).
- The mass per area of the elements above the lip was calculated using the total area (19.32 m²).
- The mass per area of the ceiling elements was calculated using the exposed area (17.85 m²).

ASTM E90 Test Results – Airborne Sound Transmission Loss

Client: AMC Mecanocaucho
Specimen ID: A1-019524-03F


Test ID: TLF-22-013
Date of Test: 2022-03-31

Room	Volume (m ³)	Air Temperature (°C)	Humidity (%)
Upper	174.0	20.9	41.0 - 41.1
Lower	176.9	18.4	48.1 - 49.1

Area S of test specimen:	17.85	m ²
--------------------------	-------	----------------

f (Hz)	Airborne TL (dB)
50	37
63	43
80	45
100	48
125	50
160	50
200	50
250	56
315	60
400	65
500	68
630	74
800	75
1000	77
1250	81 *
1600	84 c
2000	90 c
2500	91 *
3150	92 *
4000	91 *
5000	91 *
Sound Transmission Class (STC) 68	

Sum of Deficiencies (dB)
26
Max. Deficiency (dB)
8 dB at 200 Hz

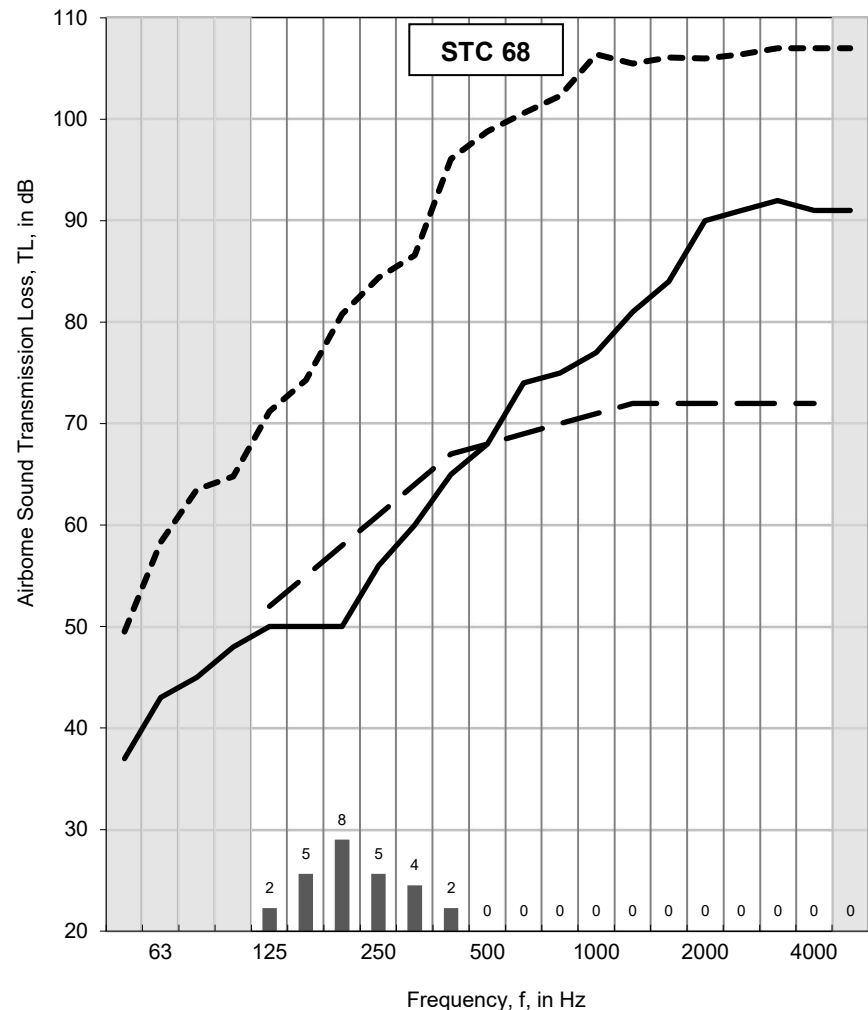

For a description of the test specimen and mounting conditions see text pages before. The results in this report apply only to the specific sample submitted for measurement. No responsibility is assumed for performance of any other specimen. **Airborne sound transmission loss measurements were conducted in accordance with the requirements of ASTM E90-09, "Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements".**

In the graph:

The solid line is the measured sound transmission loss for this specimen. The dashed line is the STC contour fitted to the measured values according to ASTM E413-16. The dotted line (may be above the displayed range) is the flanking limit established for this facility. For any frequency band where the measured transmission loss is less than 10 dB lower than the dotted line, the reported value is potentially limited by flanking transmission via laboratory surfaces, and the true value may be higher than that measured. Bars at the bottom of the graph show deficiencies where the measured data are less than the reference contour as described in the fitting procedure for the STC, defined in ASTM E413-16. The shaded cells in the table and areas in the graph are outside the STC contour range.

In the table:

Values marked "c" indicate that the measured background level was between 5 dB and 10 dB below the combined receiving room level and background level. The reported values have been corrected according to the procedure outlined in ASTM E90-09. Values marked "*" indicate that the measured background level was less than 5 dB below the combined receiving room level and background level, in which case, the corrected values provide an estimate of the lower limit of airborne sound transmission loss.

ASTM E492 Test Results – Normalized Impact Sound Pressure Levels

Client: AMC Mecanocaicho
Specimen ID: A1-019524-03F


Test ID: IIF-22-009
Date of Test: 2022-03-31

Room	Volume (m ³)	Air Temperature (°C)	Humidity (%)
Upper	174.0	21.2 – 21.2	39.0 – 39.5
Lower	176.9	18.2	45.1 – 45.2

Area S of test specimen:	17.85	m ²
--------------------------	-------	----------------

f (Hz)	NISPL (dB)
50	55
63	47
80	49
100	51
125	48
160	48
200	47
250	44
315	42
400	40
500	39
630	35
800	30
1000	26
1250	23 c
1600	13 *
2000	10 *
2500	9 *
3150	10 *
4000	11 *
5000	13 *
Impact Insulation Class (IIC) 69	

Sum of Positive Differences (dB)
23
Max. Positive Difference (dB)
8 dB at 100 Hz

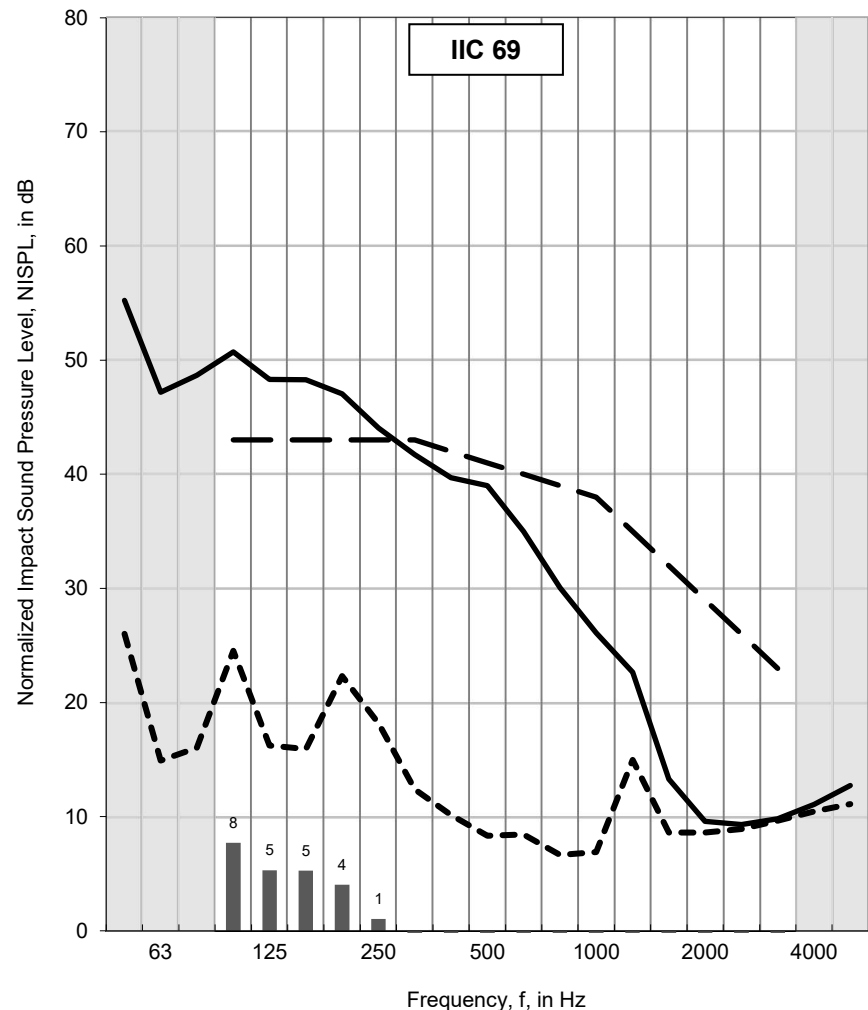

For a description of the test specimen and mounting conditions see text pages before. The results in this report apply only to the specific sample submitted for measurement. No responsibility is assumed for performance of any other specimen. **Measurements of normalized impact sound pressure level (NISPL) were conducted in accordance with the requirements of ASTM E492-09, "Standard Laboratory Measurement of Impact Sound Transmission through Floor-Ceiling Assemblies Using the Tapping Machine".**

In the graph:

The solid line is the measured normalized impact sound pressure level (NISPL) for this specimen. The dashed line is the IIC contour fitted to the measured values according to ASTM E989-21. The dotted line is the background sound level measured in the receiving room during this test (may be below the displayed range). For any frequency where the measured NISPL is less than 10 dB above the dotted line, the reported values were adjusted as noted below. Bars at the bottom of the graph show positive differences; where the measured data are greater than the reference contour as defined in ASTM E989-21. Shaded cells in the table and areas in the graph are outside the IIC contour range.

In the table:

Values marked "c" indicate that the measured background level was between 5 dB and 10 dB below the combined receiving room level and background level. Values marked "*" indicate that the measured background level was less than 5 dB below the combined receiving room level and background level and the reported values of NISPL provide an estimate of the upper limit of normalized impact sound pressure level, according to the procedure outlined in ASTM E492-09. The reported values of NISPL have been corrected according to the procedure outlined in ASTM E492-09.

Fast Weighted Peak Levels – Heavy/Soft Impact Source (Ball)

Client: AMC Mecanocaucho

Test ID: HVF-22-008


Specimen ID: A1-019524-03F

Date of Test: 2022-03-31

	Volume (m ³)	Air Temperature (°C)	Humidity (%)
Upper	174.0	21.0	39.5 – 39.6
Lower	176.9	18.3	46.4 – 46.5

Area S of test specimen:	17.85	m ²
--------------------------	-------	----------------

<i>f</i> (Hz)	<i>L</i> _{IF,MAX} (dB)
50	73
63	56
80	52
100	51
125	46
160	44
200	40 c
250	32 c
315	27 c
400	22 c
500	17 c
630	12 *
800	10 *
1000	9 *
1250	15 *
1600	9 *
2000	10 *
2500	10 *
3150	11 *
4000	12 *
5000	13 *

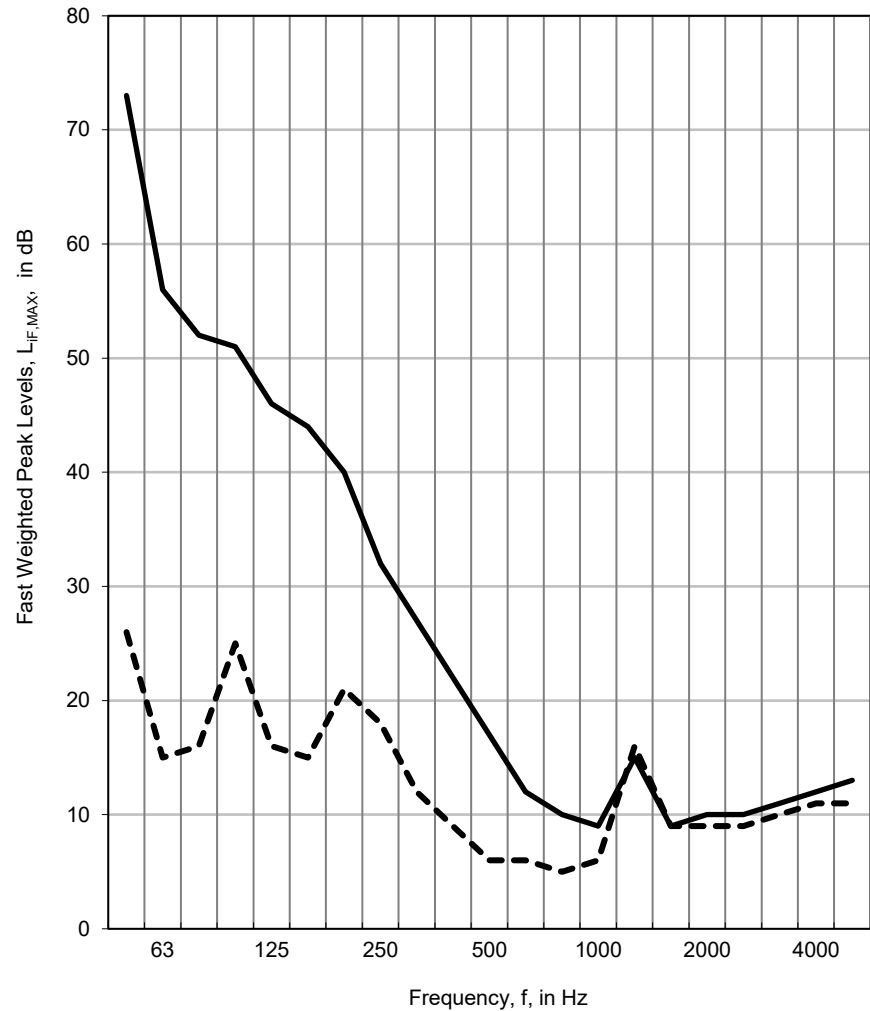

For a description of the test specimen and mounting conditions see text pages before. The results in this report apply only to the specific sample submitted for measurement. No responsibility is assumed for performance of any other specimen. See appendix “Heavy Impact Sound Transmission – Floor Facility” for more details on the test procedure.

In the graph:

The solid line is the measured fast weighted peak levels (*L*_{IF,MAX}) for this specimen using a heavy/soft impact source as described in Annex F of ISO 10140-5:2010. The dotted line is the background sound level measured in the receiving room during this test (may be below displayed range). For any frequency where measured *L*_{IF,MAX} is less than 15 dB above the dotted line, the reported values were adjusted as noted below.

In the table:

Values marked “c” indicate that the measured background level was between 6 dB and 15 dB below the combined receiving room level and background level. The marked values of *L*_{IF,MAX} have been corrected according to the procedure outlined in ISO 10140-4 section 4.3. Values marked “*” indicate that the measured background level was less than 6 dB below the combined receiving room level and background level, in which case, the corrected values provide an estimate of the upper limit of *L*_{IF,MAX}.

APPENDIX: ASTM E90-09 – Airborne Sound Transmission – Floor Facility

Facility and Equipment: The NRC Construction Floor Sound Transmission Facility comprises two reverberation rooms (referred to in this report as the upper and lower rooms) with a moveable test frame between the rooms. Both rooms have an approximate volume of 175 m³. In each room, there are 8 pre-polarized diffuse-field ½" microphones, Brüel & Kjær Type 4942. Measurements are made in both rooms simultaneously using a NI PXI-4499 DAQ system with LabVIEW measurement software. Each room has four bi-amped loudspeakers driven by separate amplifiers and noise sources. To increase diffusivity of the sound field, there are fixed diffusing panels in each room.

Test Procedure: Airborne sound transmission measurements were conducted in accordance with the requirements of ASTM E90-09, "Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements." Airborne sound transmission loss tests were performed in the forward (receiving room is the lower room) and reverse (receiving room is the upper room) directions. Results presented in this report are the average of the tests in these two directions. In each case, sound transmission loss values were calculated from the average sound pressure levels of both the source and receiving rooms and the average reverberation times of the receiving room. One-third octave band sound pressure levels were measured for 32 seconds at eight microphone positions in each room and then averaged to get the average sound pressure level in each room. Ten sound decays were averaged for each microphone (8) located in the respective receiving rooms; these eight reverberation times were averaged to get the average reverberation times for each room. Information on the flanking limit of the facility and reference specimen test results are available on request.

Significance of Test Results: ASTM E90-09 requires measurements in one-third octave bands in the frequency range 100 Hz to 5000 Hz. The standard recommends making measurements and reporting results over a larger frequency range, and this report presents such results, which may be useful for expert evaluation of the specimen performance. The precision of results outside the 100 Hz to 5000 Hz range has not been established, but is expected to depend on laboratory-specific factors.

Sound Transmission Class (STC): The Sound Transmission Class (STC) was determined in accordance with ASTM E413-16, "Classification for Rating Sound Insulation". It is a single-number rating scheme intended to rate the acoustical performance of a partition element separating offices or dwellings. The higher the value of the rating, the better the performance. The rating is intended to correlate with subjective impressions of the sound insulation provided against the sounds of speech, radio, television, music, and similar sources of noise characteristic of offices and dwellings. The STC is of limited use in applications involving noise spectra that differ markedly from those referred to above (for example, heavy machinery, power transformers, aircraft noise, motor vehicle noise). Generally, in such applications it is preferable to consider the source levels and insulation requirements for each frequency band.

In Situ Performance: Ratings obtained by this standard method tend to represent an upper limit to what might be measured in a field test, due to structure-borne transmission ("flanking") and construction deficiencies in actual buildings.

APPENDIX: ASTM E492-09 – Light Impact Sound Transmission – Floor Facility

Facility and Equipment: The NRC Construction Floor Sound Transmission Facility comprises two reverberation rooms (referred to in this report as the upper and lower rooms) with a moveable test frame between the two rooms. Both rooms have an approximate volume of 175 m³. For impact sound transmission, only the lower room is used. In each room, there are 8 pre-polarized diffuse-field 1/2" microphones, Brüel & Kjær Type 4942. Measurements are made in both rooms simultaneously using a NI PXI-4499 DAQ system with LabVIEW measurement software. Each room has four bi-amped loudspeakers driven by separate amplifiers and noise sources. To increase diffusivity of the sound field, there are fixed diffusing panels in each room.

Test Procedure: Impact sound transmission measurements were conducted in accordance with ASTM E492-09, "Standard Test Method for Laboratory Measurement of Impact Sound Transmission through Floor-Ceiling Assemblies Using the Tapping Machine." This method uses a standard tapping machine placed at four prescribed positions on the floor. One-third octave band sound pressure levels were measured for 32 seconds at each microphone position in the receiving room and then averaged to get the average sound pressure level in the room. Ten sound decays were averaged for each microphone (8) located in the respective receiving rooms; these eight reverberation times were averaged to get the average reverberation times for each room. Information on the flanking limit of the facility and reference specimen test results are available on request. The spatial average sound pressure levels and reverberation times of the receiving room were used to calculate the Normalized Impact Sound Pressure Levels. Information on the flanking limit of the facility and reference specimen test results are available on request.

Significance of Test Results: ASTM E492-09 requires measurements in one-third octave bands in the frequency range 100 Hz to 3150 Hz. The standard recommends making measurements and reporting results over a larger frequency range, and this report presents such results, which may be useful for expert evaluation of the specimen performance. The precision of results outside the standard ranges has not been established, and is expected to depend on laboratory-specific factors such as room size and specimen dimensions.

Impact Insulation Class (IIC): The Impact Insulation Class (IIC) was determined in accordance with ASTM E989-21, "Standard Classification for Determination of Impact Insulation Class (IIC)". It is a single-number rating scheme intended to rate the effectiveness of floor-ceiling assemblies at preventing the transmission of impact sound from the standard tapping machine. A higher IIC value indicates a better floor performance.

In Situ Performance: Ratings obtained by this standard method tend to represent an upper limit to what might be measured in a field test, due to structure-borne transmission ("flanking") and construction deficiencies in actual buildings.

APPENDIX: Heavy Impact Sound Transmission – Floor Facility

Facility and Equipment: The NRC Construction Floor Sound Transmission Facility comprises two reverberation rooms (referred to in this report as the upper and lower rooms) with a moveable test frame between the two rooms. Both rooms have an approximate volume of 175 m³. For impact sound transmission, only the lower room is used. In each room, there are 8 pre-polarized diffuse-field 1/2" microphones, Brüel & Kjær Type 4942. Measurements are made in both rooms simultaneously using a NI PXI-4499 DAQ system with LabVIEW measurement software. Each room has four bi-amped loudspeakers driven by separate amplifiers and noise sources. To increase diffusivity of the sound field, there are fixed diffusing panels in each room.

Test Procedure: Impact tests were conducted following the recommendations in ISO 10140-3:2010 Annex A. A heavy/soft impact source described in Annex F of ISO 10140-5:2010 was dropped from a height of 100 cm over 5 different positions, on quarter lengths of both floor diagonals and in the centre of the room. Receive levels in the room below were measured simultaneously at 8 different microphone positions as fast-weighted (125 ms) peak levels in one-third octave bands ($L_{iF,MAX}$). The $L_{iF,MAX}$ values measured at the different microphone positions were energy averaged for each excitation position. Then, the calculated fast weighted peak levels of all excitation positions were also energy averaged. One-third octave band background sound pressure levels were measured for 32 seconds at each microphone position in the receiving room and then averaged to get the average background sound pressure level in the room.

Significance of Test Results: The precision of results has not been established, and is expected to depend on laboratory-specific factors such as room size, sound absorption and specimen dimensions. The results are specific to the room in which they were measured, and an increase in volume and/or sound absorption reduces the measured fast weighted levels.

In Situ Performance: Levels obtained by this method tend to represent an upper limit to what might be measured in a field test with the same volume and absorption, due to structure-borne transmission ("flanking") and construction deficiencies in actual buildings.